




## KSM535~555MH5-72

Monofacial high efficiency mono PV module

21.48%

Module Efficiency : 21.48%

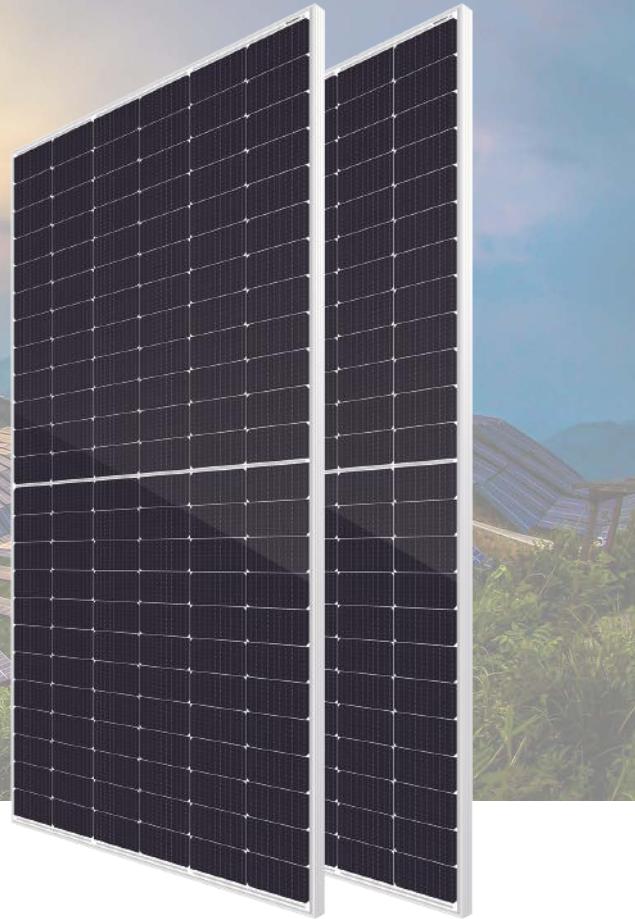

### PRODUCT FEATURES

#### High Efficiency

The multi-busbar half-cut technology can boost energy density to deliver higher output.

#### High Reliability

Certified in TUV salt spray, ammonia corrosion, 2400Pa wind load and 5400Pa snow load testing. Highly reliable.

#### High ROI

Effectively reducing BOS costs to achieve lower LCOE and enhanced project profitability.

#### Low Degradation

First-year degradation is less than 2.0%, with linear degradation of 0.55% per year for 25 years.


#### Low Risk of Hot Spot

The next-generation cell technology and optimized circuit design adopted can support improved temperature coefficient and better hotspot resistance.

#### Low Risk of Micro-Crack

The multi-busbar technology contributes to more effective prevention of Micro crack and broken busbars.

### LINEAR PERFORMANCE WARRANTY

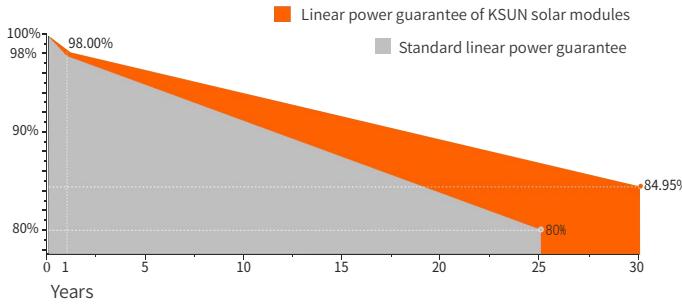

12 YEARS  
product warranty

30 YEARS  
linear power warranty

0.45 %  
Linear attenuation of 0.45% per year within 25 years

### CERTIFICATES


- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational health and safety management systems



## Electrical Data (STC)

Maximum Power (Pmax/W)	535	540	545	550	555
Open Circuit Voltage (Voc/V)	49.38	49.53	49.68	49.83	49.98
Short Circuit Current (Isc/A)	13.54	13.63	13.71	13.80	13.88
Voltage at Maximum Power (Vmp/V)	40.88	41.03	41.18	41.31	41.43
Current at Maximum Power (Imp/A)	13.10	13.17	13.24	13.32	13.40
Module Efficiency (%)	20.71	20.90	21.10	21.29	21.48
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m <sup>2</sup> , Cell Temperature 25°C , AM1.5					

## Module Dimensions (mm)

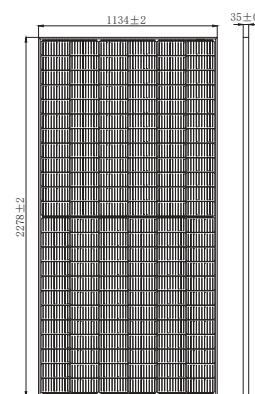


## Electrical Data (NMOT)

Maximum Power (Pmax/W)	400	404	408	412	416
Open Circuit Voltage (Voc/V)	45.41	45.56	45.71	45.85	46.00
Short Circuit Current (Isc/A)	11.29	11.37	11.44	11.53	11.60
Voltage at Maximum Power (Vmp/V)	37.64	37.79	37.94	38.05	38.17
Current at Maximum Power (Imp/A)	10.64	10.70	10.77	10.83	10.90

NMOT (Nominal Moudule Operating Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C , AM1.5, Wind Speed 1m/s.

## Mechanical Data

Cell Type	182×91mm Mono
Cell Orientation	144(6×24)
Module Dimensions	2278×1134×35mm
Weight	28.0kg
Glass	3.2mm high transmittance, reinforced glass
Backsheet	Anti-aging film
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm <sup>2</sup> positive pole: 200 mm negative pole: 250 mm wire length can be customized
Connector	MC4 compatible connector

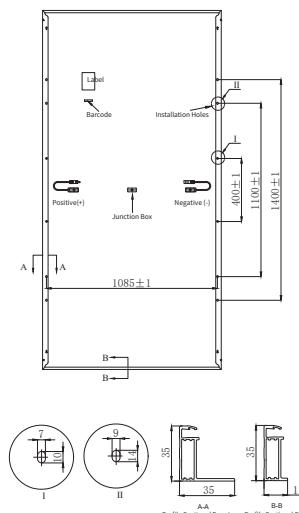

## Temperature Coefficients

Temperature Coefficient (Pm)	-0.340%/°C
Temperature Coefficient (Voc)	-0.270%/°C
Temperature Coefficient (Isc)	0.048%/°C
NMOT (Nominal Moudule Operating Temperature)	41±3°C

## Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	620pcs	31pcs +31pcs



E-mail: sales@ksunsolar.com  
Website: www.ksunsolar.com

Data contained in these specifications is subject to change without notice.  
KSUNSolar reserves the right to final interpretation of content.  
KSUNSolar V.220209/EN

## I-V Curve

