

Electrical Data (STC)

Maximum Power (Pmax/W)	535	540	545	550	555
Open Circuit Voltage (Voc/V)	49.38	49.53	49.68	49.83	49.98
Short Circuit Current (Isc/A)	13.54	13.63	13.71	13.80	13.88
Voltage at Maximum Power (Vmp/V)	40.88	41.03	41.18	41.31	41.43
Current at Maximum Power (Imp/A)	13.10	13.17	13.24	13.32	13.40
Module Efficiency (%)	20.71	20.90	21.10	21.29	21.48
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m ² , Cell Temperature 25°C, AM1.5					

Electrical Data (NMOT)

Maximum Power (Pmax/W)	400	404	408	412	416
Open Circuit Voltage (Voc/V)	45.41	45.56	45.71	45.85	46.00
Short Circuit Current (Isc/A)	11.29	11.37	11.44	11.53	11.60
Voltage at Maximum Power (Vmp/V)	37.64	37.79	37.94	38.05	38.17
Current at Maximum Power (Imp/A)	10.64	10.70	10.77	10.83	10.90

NMOT (Nominal Module Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s.

Bifacial Power Generation Parameters (Backside Gains)

5%	Maximum Power (Pmax/W)	562	567	572	578	583
	Module Efficiency (%)	21.75	21.95	22.15	22.36	22.56
15%	Maximum Power (Pmax/W)	615	621	627	633	638
	Module Efficiency (%)	23.82	24.04	24.26	24.48	24.71
25%	Maximum Power (Pmax/W)	669	675	681	688	694
	Module Efficiency (%)	25.89	26.13	26.37	26.61	26.86

Mechanical Data

Cell Type	182×91mm Mono
Cell Orientation	144(6×24)
Module Dimensions	2278×1134×30mm
Weight	32.0kg
Glass	2.0mm high transmittance, reinforced glass
Backsheet	2.0mm part of the structure is grid-like white ceramic glass
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 200 mm negative pole: 250 mm wire length can be customized
Connector	MC4 compatible connector


Temperature Coefficients

Temperature Coefficient (Pm)	-0.340%/°C
Temperature Coefficient (Voc)	-0.270%/°C
Temperature Coefficient (Isc)	0.048%/°C
NMOT (Nominal Module Operating Temperature)	41±3°C

Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	720 pcs	36 pcs +36 pcs

Module Dimensions (mm)

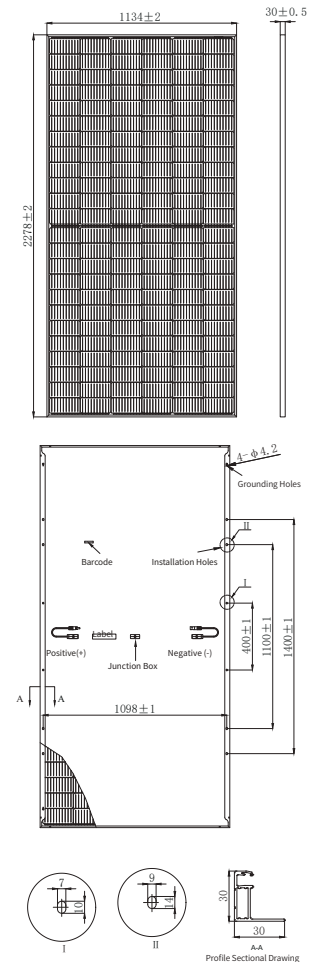

I-V Curve

